
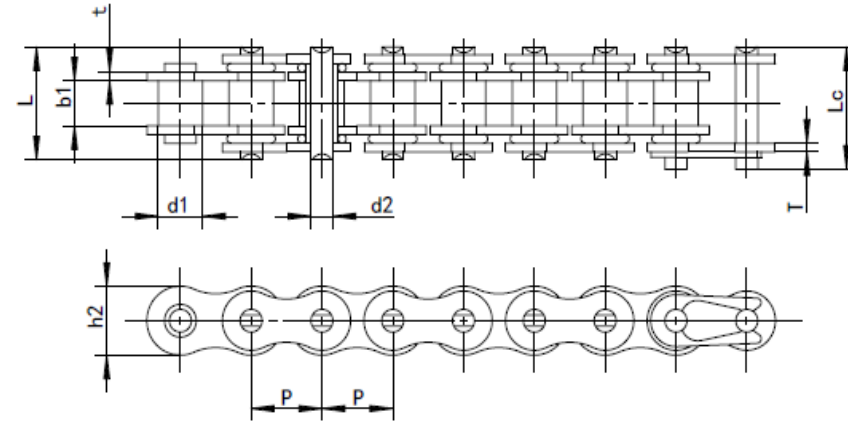


O-Ring chain

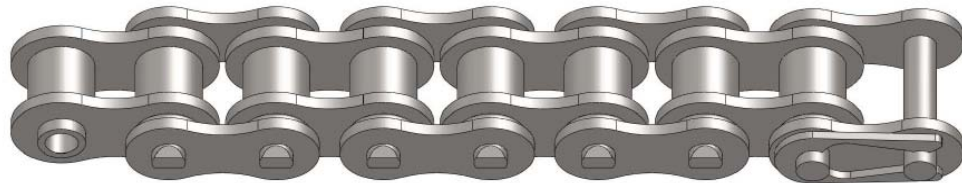

ZMIE Chain No.	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth	Plate thickne	Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	KN	kg/m
40RO	12.7	7.9	7.9	4.0	19.8	21.8	12.0	1.5	16.2	0.7
50RO	15.9	10.2	9.4	5.1	23.5	25.7	15.0	2.0	25.0	1.2
60RO	19.1	11.9	12.6	5.9	28.8	31.5	17.8	2.4	35.3	1.6
80RO	25.4	15.9	15.9	7.9	40.1	43	23.4	3.2	57.8	2.7
08BRO	12.7	8.5	7.8	4.5	19.6	21.6	11.8	1.5	17.8	0.7
10BRO	15.9	10.2	9.7	5.1	23.2	25.5	14.7	1.7	22.2	1.0
12BRO	19.1	12.1	11.7	5.7	28.6	31.3	16.1	1.8	28.9	1.3
16BRO	25.4	15.9	17.0	8.3	39.8	42.8	21.0	4.0/3.2	60.0	2.9